


Locate Main Hoop (#7) in car FIRST. All other cage components locate off of main hoop. Refer to the notes on the following pages for the main hoop.

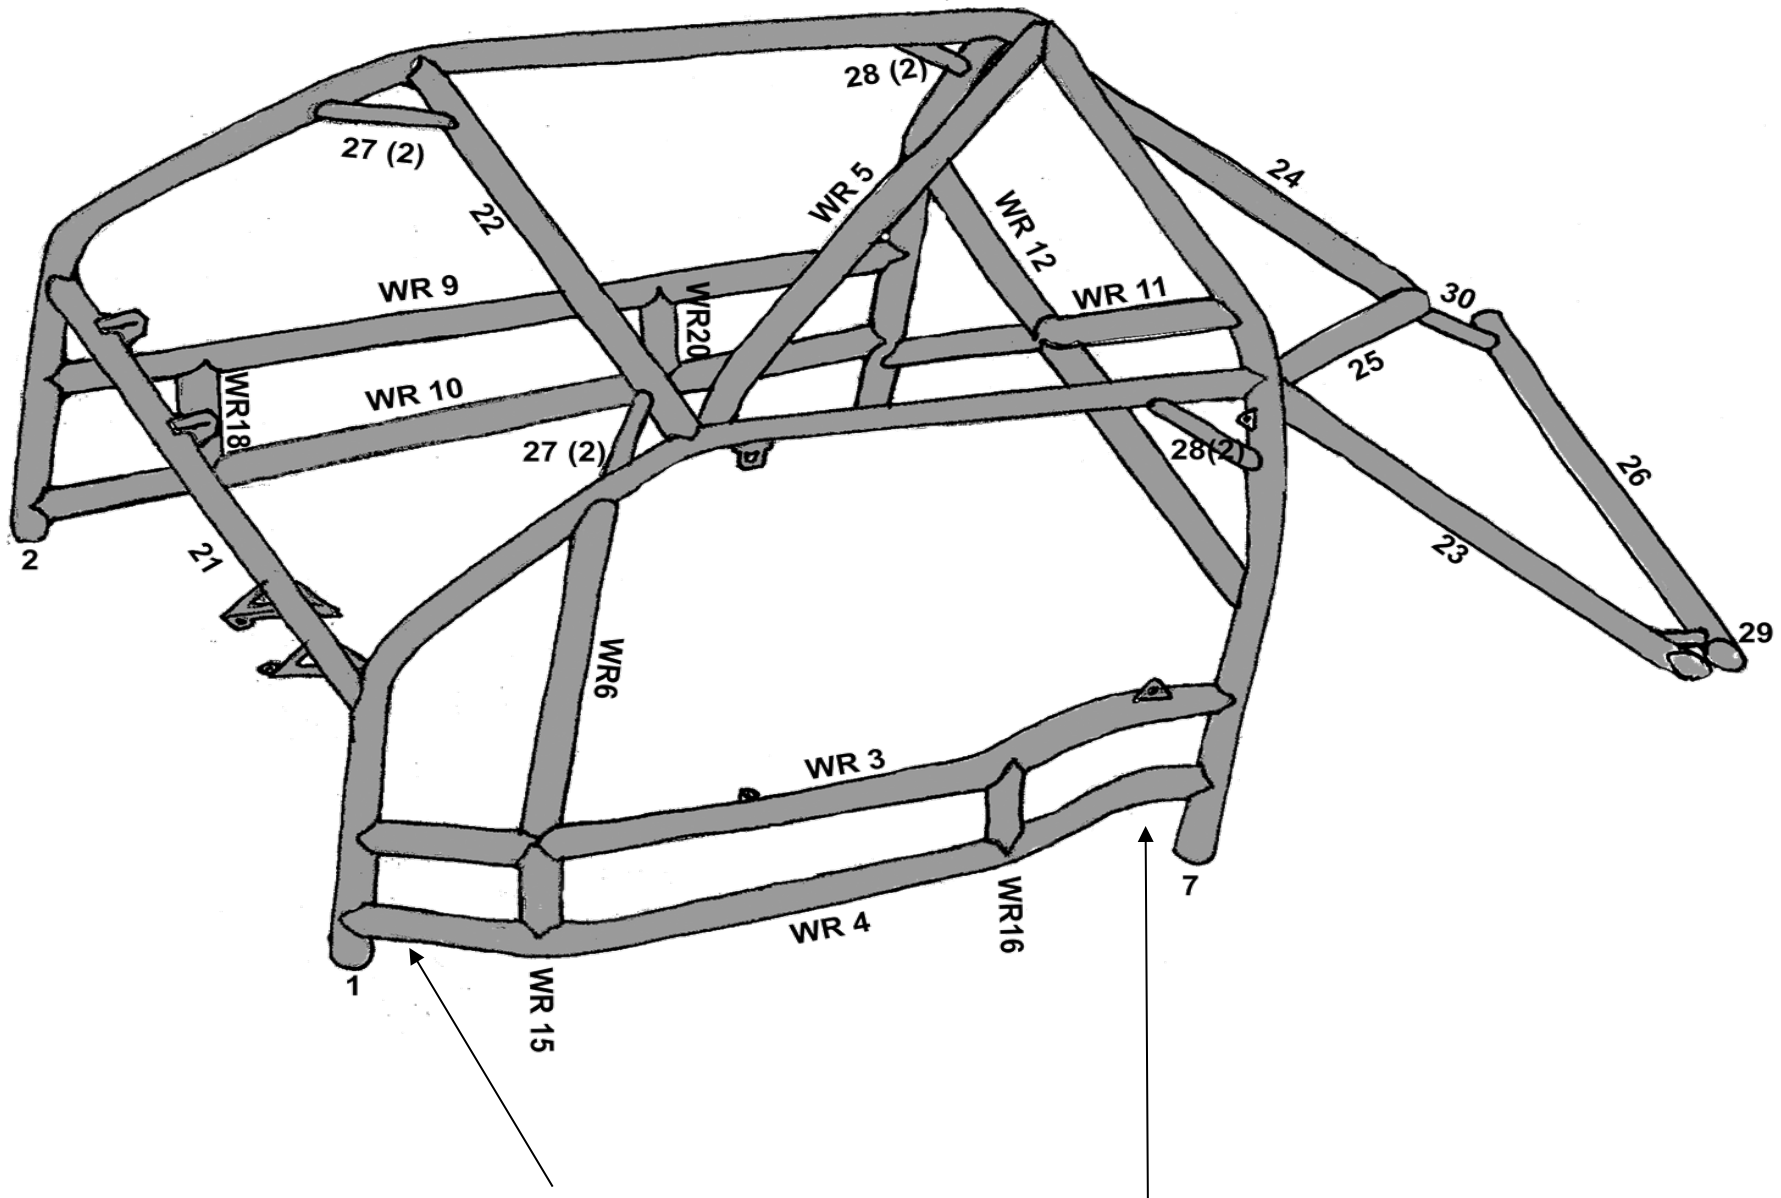

Door bars, both sides: Approximately 1.55" from floor to bottom of tube 4

Approximately 6.8" from floor to bottom of tube 4

Front of header ( tube 22 ) to main hoop ( tube 7 ) = 33.54"

Bottom of tube 21 to floor pad = 17.95"

Bottom rear of pillar tubes 1&2 to rear seat bulkhead = 46.1"

All measurements are for reference only.





Shown above :Set main hoop tube number 7 about 2" on center from the face of the rear seat bulkhead



Shown above: Set main hoop tube number 7 at approximately 6.5°

All measurements are for reference only.





Shown to the left is the proper installation of the front pad. It is strongly recommended that after the mount pads are installed, to tack weld all tubes in place prior to any finish welding.

All measurements are for reference only.

